


Industrial Display with Multi Touch (PCT)



Specifications

LCD	
Display Type	15" TFT-LCD (1024 x 768)
Display Ratio	4 : 3
Display Colors	16.2M / 262K Colors
Luminance	350 Typ. Without Touch
Contrast Ratio	800:1 (Typ.) Without Touch
Viewing Angle	160° (H), 150° (V)
Back Light MTBF (Hours)	(LED) 50,000
Mechanical	
Mounting	Panel Mount / VESA 100 x 100 or 75 x 75/ Stand
Display Area	304.128 mm x 228.096 mm
Outline Dimension	356.3mm x 280.2mm x 46.4mm
Display Operation Mode	Normally White
Certification	ROHS Compliance , CE/FCC, Class A
Environmental	
Operating Temperature	0°C ~ +65°C
Storage Temperature	- 20°C ~ +65°C
System	
On Screen Display Control	5 keys OSD keypad (Up, Down, Menu, Auto, Power)
I/O Port	DB-15 VGA x 1 , HDMI x 1 , DVI x 1 USB x 1 (For Enable T/S Function) Power Input x 1(DC 12V) by Adapter (AC 100 ~ 240V)
Os Support	Windows® 7 32/64-bit, Windows® 8 32/64-bit, Windows® 10 64-bit, Linux Ubuntu 16.04

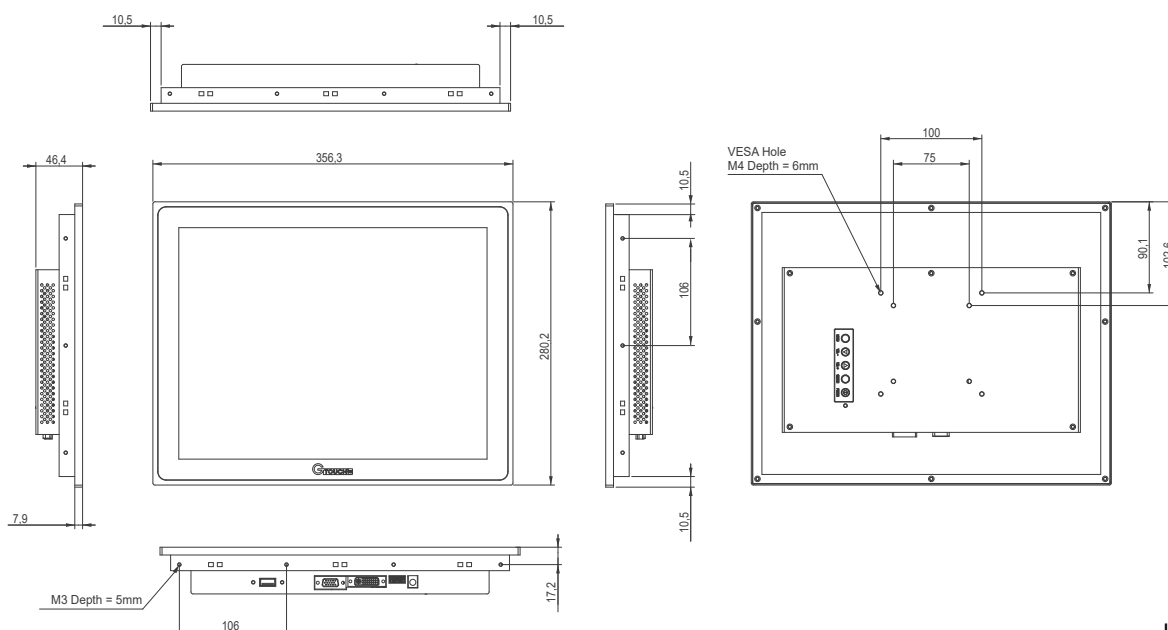

Unit: mm