


Industrial Display with Multi Touch (PCT)



Specifications

LCD	
Display Type	21.5" TFT-LCD (1920 x 1080)
Display Ratio	16 : 9
Display Colors	16.7M
Luminance	250 Typ. Without Touch
Contrast Ratio	3000:1 (Typ.) Without Touch
Viewing Angle	178° (H), 178° (V)
Back Light MTBF (Hours)	(LED) 50,000
Mechanical	
Mounting	Panel Mount / VESA 100 x 100 or 75 x 75/ Stand
Display Area	476.04 x 267.786mm
Outline Dimension	535.8mm x 333.6mm x 51.2mm
Display Operation Mode	Normally White
Certification	ROHS Compliance , CE/FCC, Class A
Environmental	
Operating Temperature	0°C ~ +50°C
Storage Temperature	- 20°C ~ +60°C
System	
On Screen Display Control	5 keys OSD keypad (Up, Down, Menu, Auto, Power)
I/O Port	DB-15 VGA x 1 , HDMI x 1 , DVI x 1 USB x 1 (For Enable T/S Function) Power Input x 1(DC 12V) by Adapter (AC 100 ~ 240V)
Os Support	Windows® 7 32/64-bit, Windows® 8 32/64-bit, Windows® 10 64-bit, Linux Ubuntu 16.04

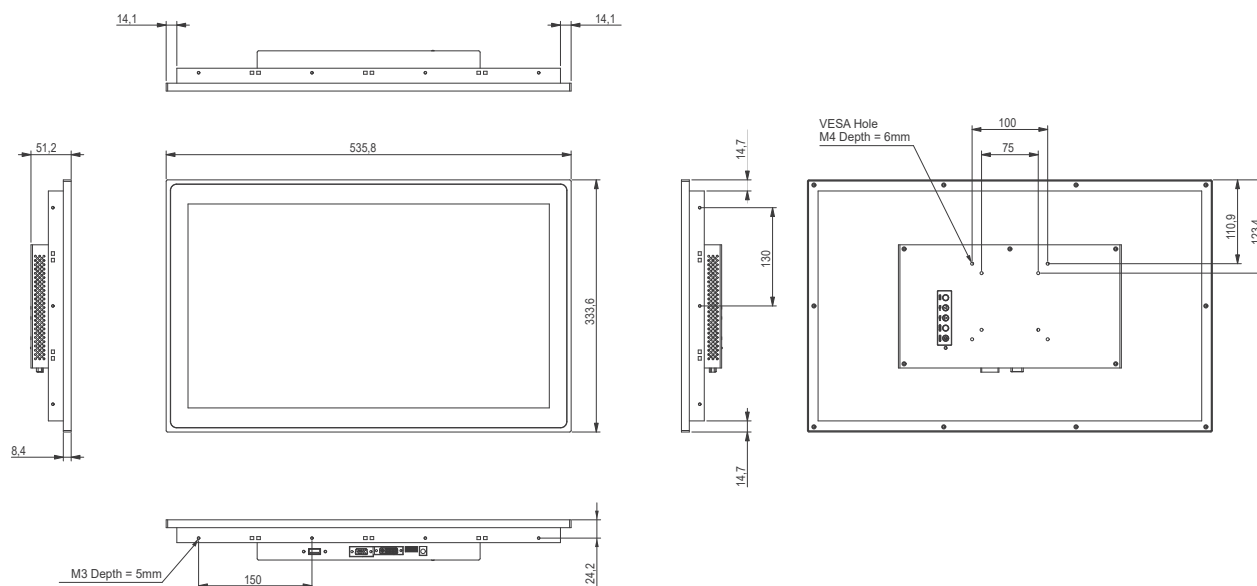

Unit: mm