


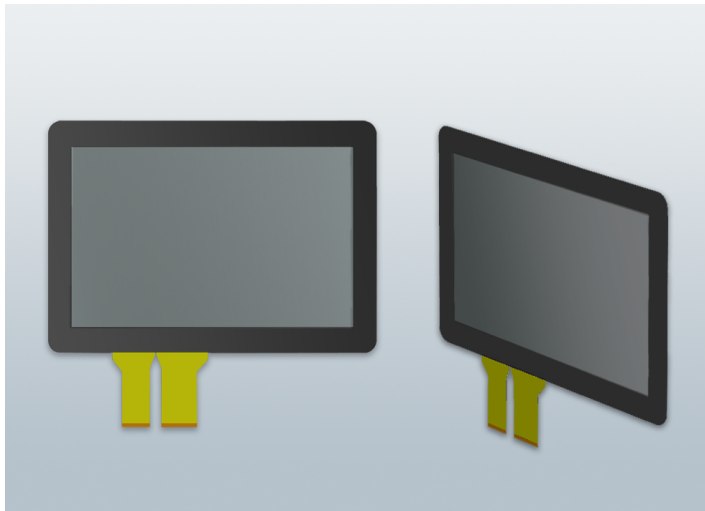

10.1" Industrial Display kit with PCT Touch Solution

Features

- 10.1" LCD supports 1280 x 800 pixels
- Brightness of 400 cd/m² with LED backlight
- Projected Capacitive touch solution
- LVDS signal interface
- Low power consumption
- Touch controller included (USB)
- Anti Reflector surface treatment (optional)
- Optical bonding (optional)

Specifications

LCD Panel	Display Size	10.1"
	Resolution	1280 x 800
	Display mode	MVA, Normally Black
	Viewing Angle (U/D/L/R)	170° / 170°
	Brightness	400 cd/m ²
	Backlight Life (hrs)	25,000 min
	Contrast Ratio	1300 : 1
	Response Time	40 ms
	Colors	262K colors
	LCD Input Voltage	3.3V
	Consumption	3.4 W
	Signal Interface	1 channel LVDS
Touch Screen	Weight	187g
	Dimensions (W x H x D)	245.96 x 172.60 x 2.0 mm
	Touch Type	Projected Capacitive
	Transparency	85± 5%
	Interface	USB
Environment	Black Print	Yes
	Operating Temperature	20 ~ 60 °C
	Storage Temperature	-30 ~ 70 °C

Unit: mm

