


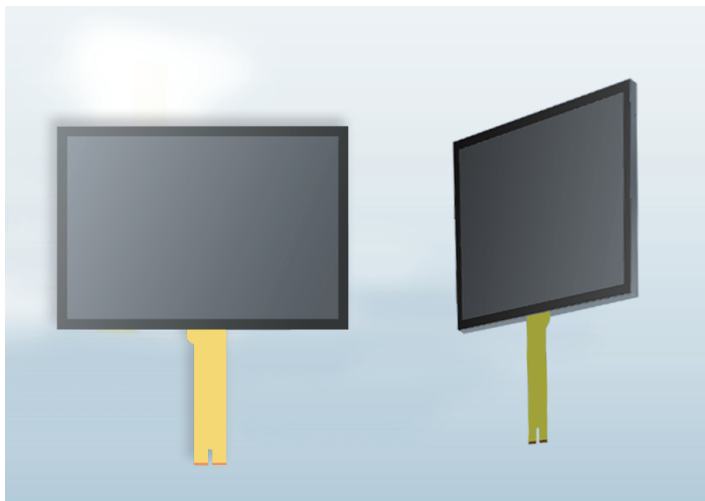

15" Industrial Display kit with PCT Touch Solution

Features

- 15" LCD supports 1024 x 768 pixels
- Brightness of 500 cd/m² with LED backlight
- Projected Capacitive touch solution
- LVDS signal interface
- Low power consumption
- Touch controller included (USB)
- Anti Glare surface treatment (optional)
- Optical bonding (optional)

Specifications

LCD Panel	Display Size	15"
	Resolution	1024 x 768
	Display mode	Normally Black
	Viewing Angle (U/D/L/R)	160° / 160°
	Brightness	500 cd/m ²
	Backlight Life (hrs)	50,000 min
	Contrast Ratio	2500 : 1
	Response Time	16 ms
	Colors	16.7M
	LCD Input Voltage	3.3V
	Consumption	14 W
	Signal Interface	1 channel LVDS
	Weight	960g
Touch Screen	Dimensions (W x H x D)	326.5 x 253.5 x 1.1 mm
	Touch Type	Projected Capacitive
	Transparency	85± 5%
	Interface	USB
	Black Print	Yes
Environment	Operating Temperature	-30 ~ 80 °C
	Storage Temperature	-40 ~ 80 °C

