


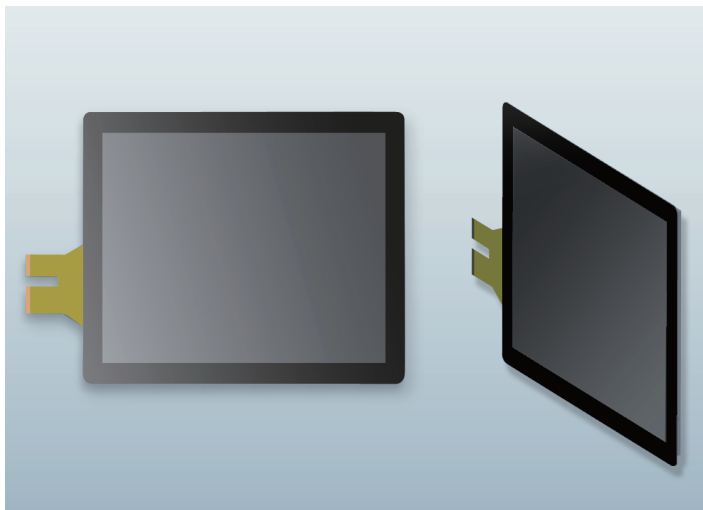

15" Industrial Display kit with PCT Touch Solution

## Features

- 15" LCD supports 1024 x 768 pixels
- Brightness of 500 cd/m<sup>2</sup> with LED backlight
- Projected Capacitive touch solution
- LVDS signal interface
- Low power consumption
- Touch controller included (USB)
- Anti Glare surface treatment (optional)
- Optical bonding (optional)

## Specifications

|              |                         |                           |
|--------------|-------------------------|---------------------------|
| LCD Panel    | Display Size            | 15"                       |
|              | Resolution              | 1024 x 768                |
|              | Display mode            | Normally Black            |
|              | Viewing Angle (U/D/L/R) | 160° / 160°               |
|              | Brightness              | 500 cd/m <sup>2</sup>     |
|              | Backlight Life (hrs)    | 50,000 min                |
|              | Contrast Ratio          | 2500 : 1                  |
|              | Response Time           | 16 ms                     |
|              | Colors                  | 16.7M                     |
|              | LCD Input Voltage       | 3.3V                      |
|              | Consumption             | 14 W                      |
|              | Signal Interface        | 1 channel LVDS            |
| Touch Screen | Weight                  | 960g                      |
|              | Dimensions (W x H x D)  | 346.08 x 270.02 x 11.1 mm |
|              | Touch Type              | Projected Capacitive      |
|              | Transparency            | 85± 5%                    |
|              | Interface               | USB                       |
| Environment  | Black Print             | Yes                       |
|              | Operating Temperature   | -30 ~ 80 °C               |
|              | Storage Temperature     | -40 ~ 80 °C               |

Unit: mm

