


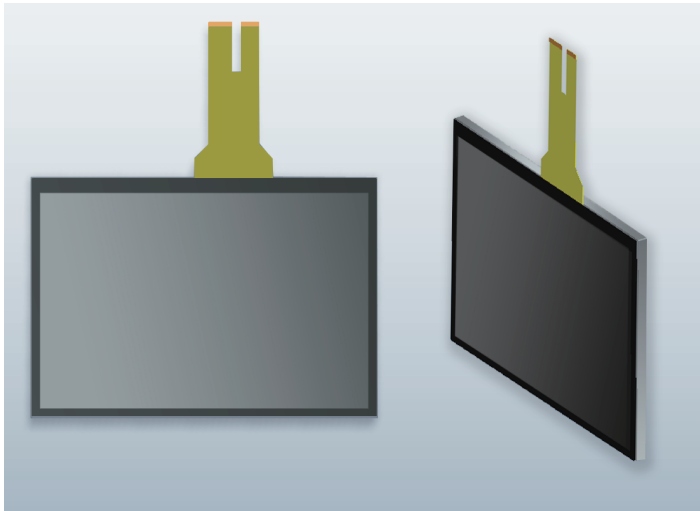

17.3" Industrial Display kit with PCT Touch Solution


Features

- 17.3" LCD supports 1920 x 1080 pixels
- Brightness of 400 cd/m² with LED backlight
- Projected Capacitive touch solution
- LVDS signal interface
- Low power consumption
- Touch controller included (USB)
- Anti Reflector surface treatment (optional)
- Optical bonding (optional)

Specifications

LCD Panel	Display Size	17.3"
	Resolution	1920 x 1080
	Display mode	Normally White (TN)
	Viewing Angle (U/D/L/R)	140° / 160°
	Brightness	400 cd/m ²
	Backlight Life (hrs)	50,000 min
	Contrast Ratio	600 : 1
	Response Time	40 ms
	Colors	16.7M
	LCD Input Voltage	3.3V
	Consumption	15 W
	Signal Interface	1 channel LVDS
Touch Screen	Weight	1080g
	Dimensions (W x H x D)	402 x 239 x 2.05 mm
	Touch Type	Projected Capacitive
	Transparency	85± 5%
	Interface	USB
Environment	Black Print	Yes
	Operating Temperature	0 ~ 70 °C
	Storage Temperature	-20 ~ 70 °C

Unit: mm

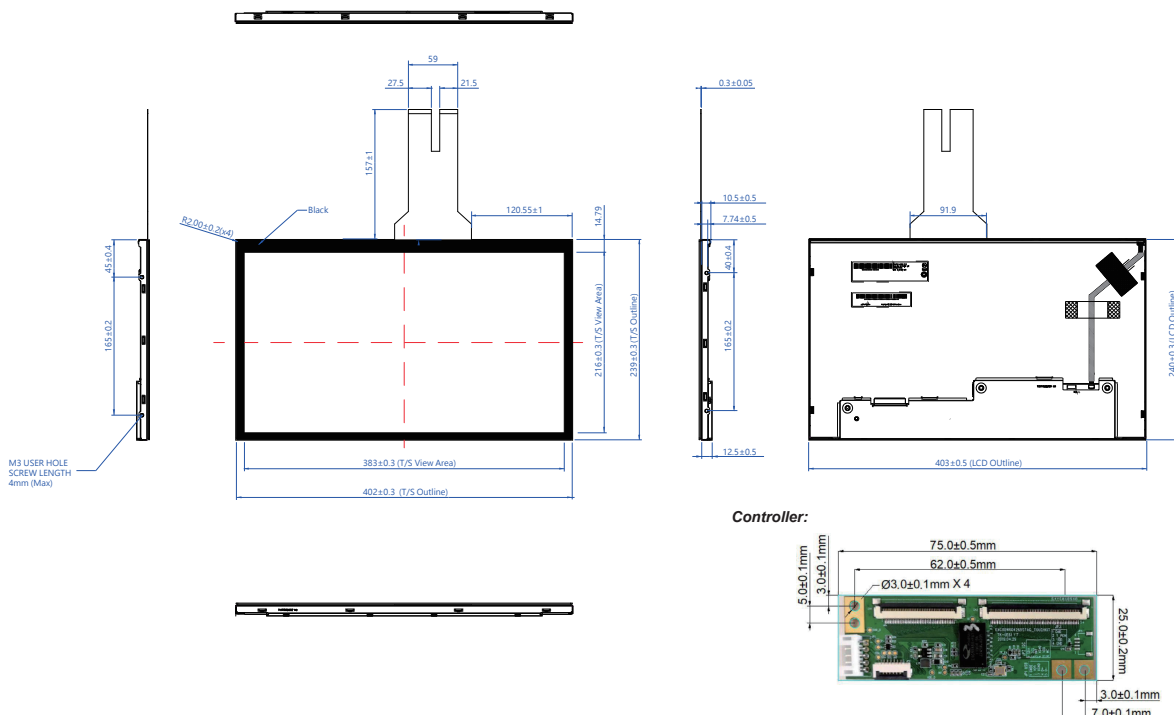

Controller: