



NOTES:
1.COVER LENS SURFACE HARDNESS≥6H(750GF);
CS≥450MPA;
2.AG ETCHING,
GLOSS:90±10%; HAZE:6.5±5%;Ra:0.11±0.03
3.GG STRUCTURE;TP-IC:EXC80W60;
M/N: P80H60 BFW SE0635;
F/W: V1.16;
4.OPERATION TEMPERATURE:-20℃~70℃
STORAGE TEMPERATURE:-30℃~80℃
5.GENERAL TOLERANCES: ±0.3mm;

J1 USB	
PIN	DESCRIP
1	+5VDC
2	USB_DATA-
3	USB_DATA+
4	GND
5	NC

J2 I2C	
PIN	DESCRIP
1	RST
2	I2C_INT
3	I2C_SCL
4	I2C_SDA
5	VDD
6	GND_EARTH

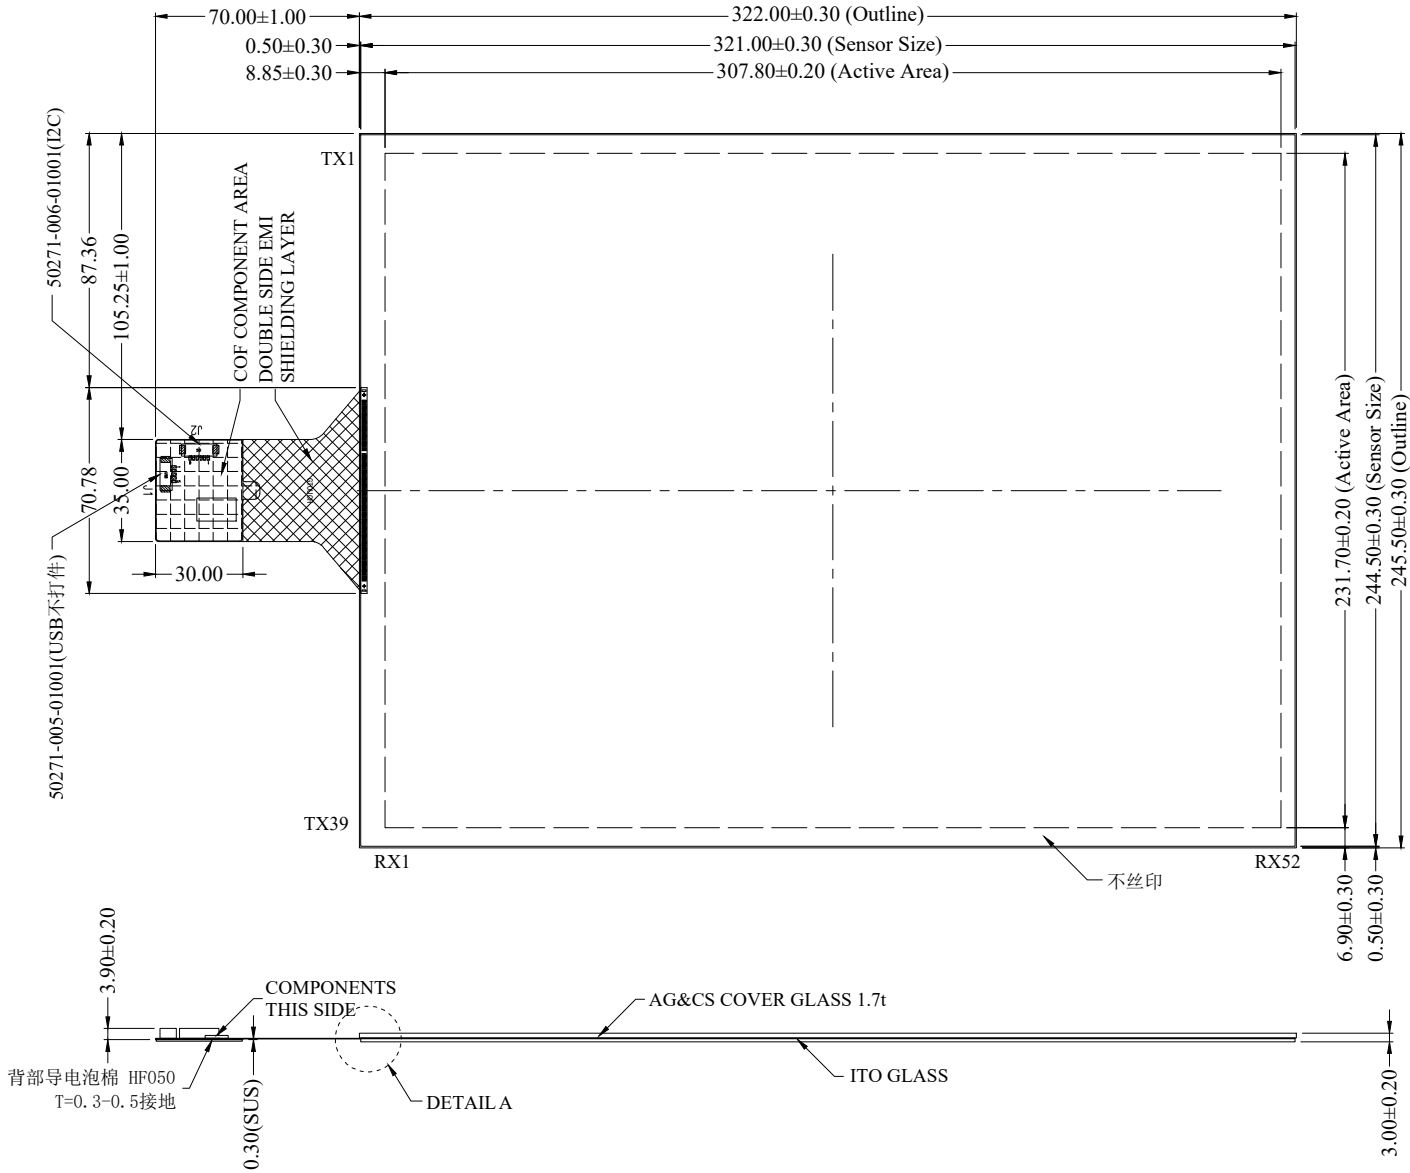

DETAIL A

				DIMENSION UNIT	mm	MODEL NO.	GP-150G-PG-NX06B	CUSTOMER APPROVED	NOTE
△	V02	2021.01.27	增加IC M/N及F/W说明	DRAWN	Kelin	ISSUE DATE	2021/01/27		
△	V01	2019.11.29	INITIAL RELEASE	CHECK	LiuRongJuan	SCALE	1/1		
MARK	VRESION	DATE	REVISED DESCRIPTIONS	APPROVED	Faye	CUSTOMER ID			



深圳市坤巨实业有限公司
Groovy (Shenzhen) Industrial Corp.