


- NOTES:
- COVER LENS SURFACE HARDNESS $\geq 6H(750GF)$;
CS $\geq 450MPa$;
 - AG ETCHING,
GLOSS: $70\% \pm 10\%$; HAZE: $8\% \pm 3\%$; RA: 0.13 ± 0.03 ;
 - GG STRUCTURE; TP-IC: EXC80W60;
 - OPERATION TEMPERATURE: $-20^{\circ}C \sim 70^{\circ}C$
STORAGE TEMPERATURE: $-30^{\circ}C \sim 80^{\circ}C$
 - GENERAL TOLERANCES: $\pm 0.3mm$;

J1 USB	
PIN	DESCRIP
1	+5VDC
2	USB DATA-
3	USB DATA+
4	GND
5	NC

J2 I2C	
PIN	DESCRIP
1	RST
2	I2C_INT
3	I2C_SCL
4	I2C_SDA
5	VCC
6	GND_EARTH

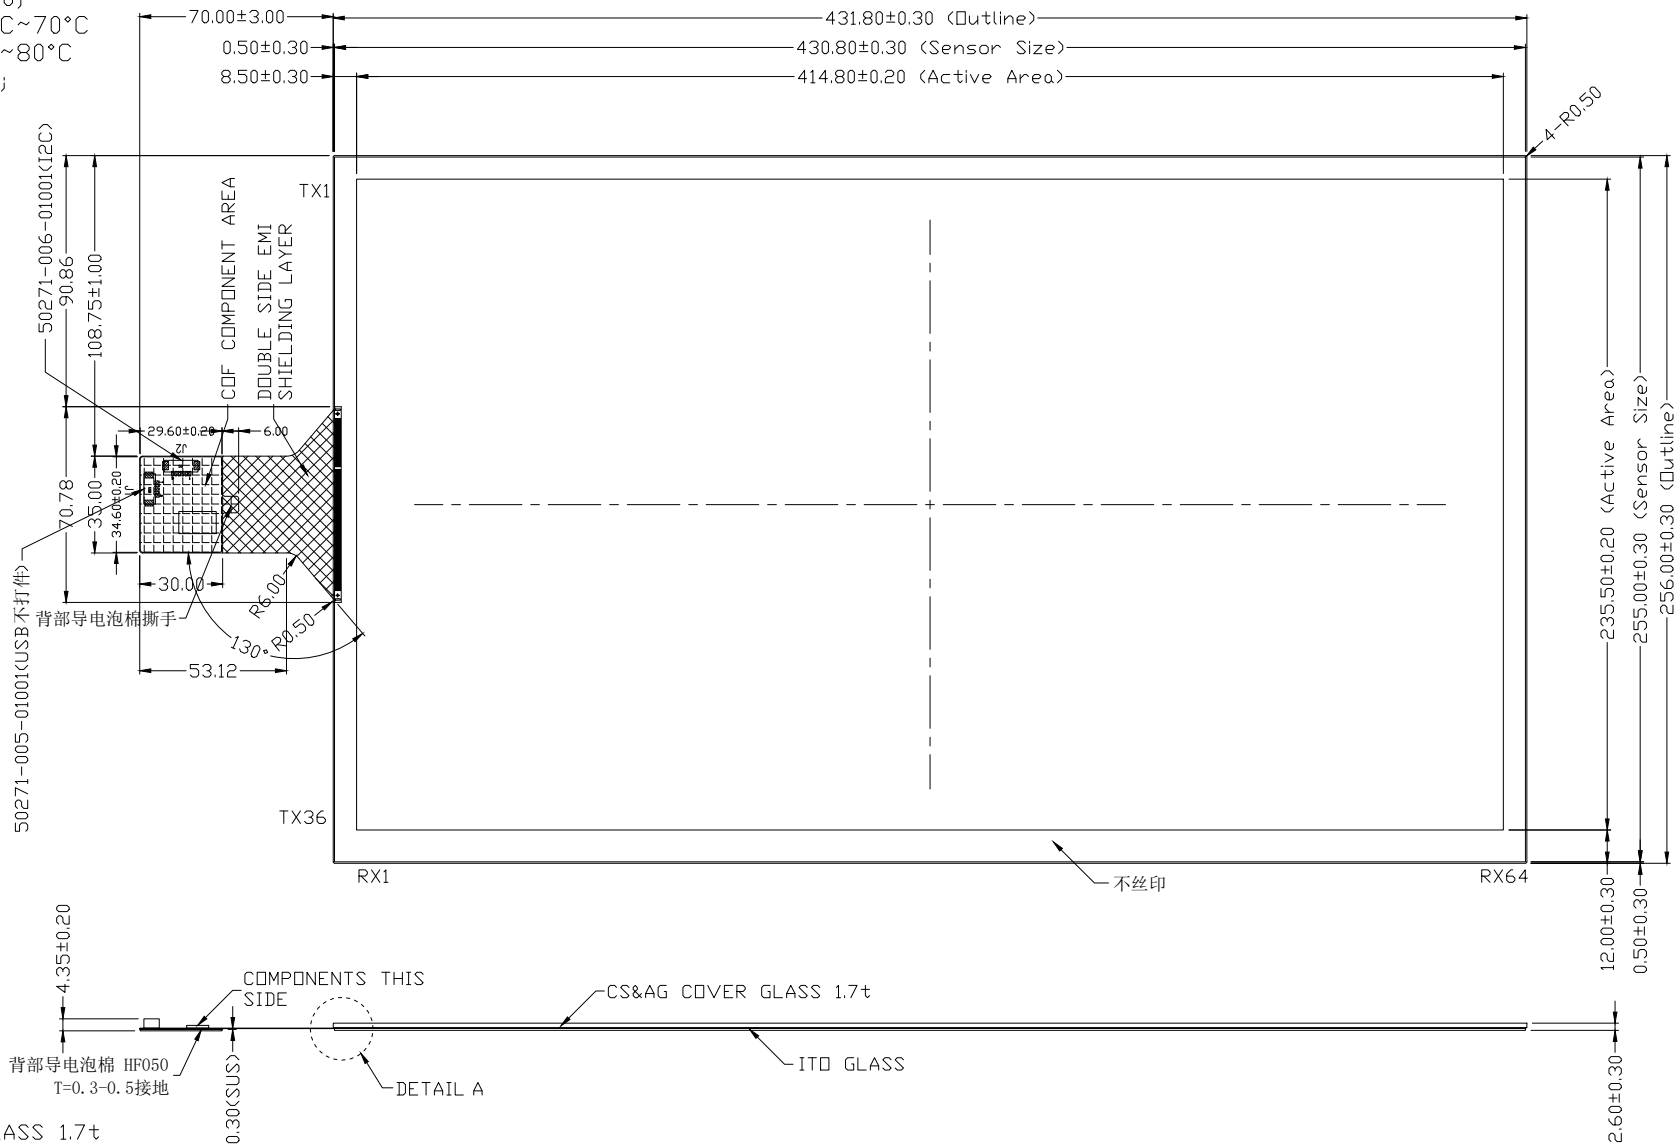

- CS&AG COVER GLASS 1.7t
- OPTICAL ADHESIVE
- ITO GLASS 0.7t

DETAIL A

REV.	DATE	REVISED DESCRIPTIONS	DIMENSION UNIT	mm	MODEL NO.	GPC-185G-PG-FX15B-SE1	CUSTOMER APPROVED	NOTE
1	19.03.19	INITIAL RELEASE	DRAWN	RAYN	ISSUE DATE	2020/04/27		
2	19.09.11	CHANGE COVER LENS PARAMETERS	CHECK	SCOTT	SCALE	-/-		
3	20.04.27	INCREASE BACK GLUE HANDLE	APPROVED	GERALD	CUSTOMER ID			



坤巨資訊股份有限公司
Groovy Technology Corp.