



J1 USB	
PIN	DESCRIP
1	+5VDC
2	USB DATA-
3	USB DATA+
4	GND
5	NC

J2 I2C	
PIN	DESCRIP
1	RST
2	I2C_INT
3	I2C_SCL
4	I2C_SDA
5	VDD
6	GND_EARTH

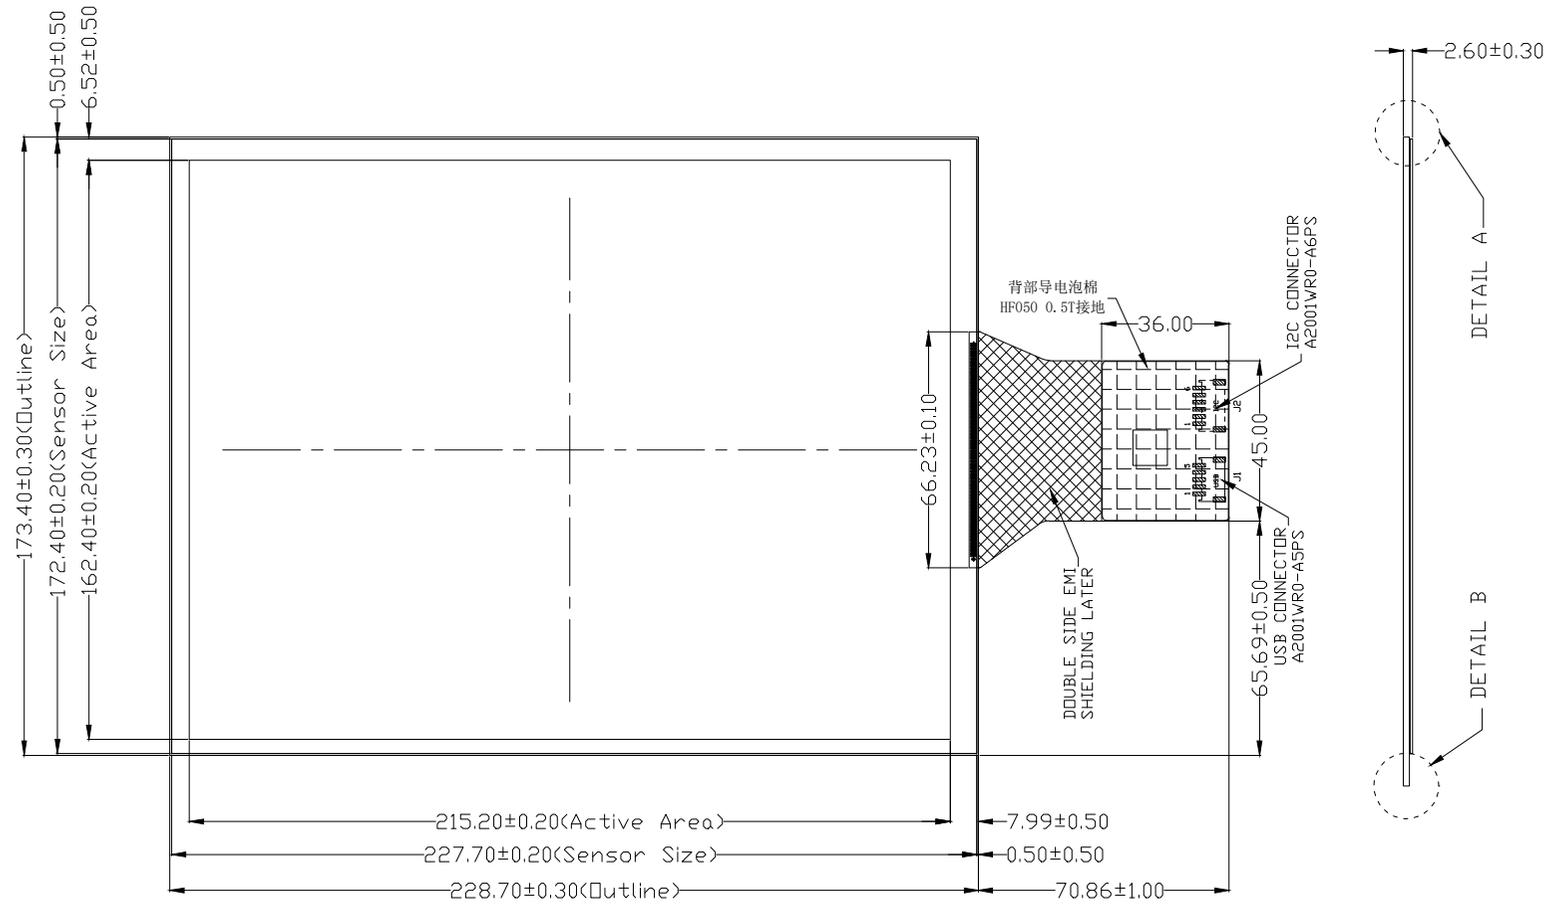


NOTES:

- COVER LENS SURFACE HARDNESS $\geq 6H$;
CS $\geq 400MPa$;
- AG ETCHING;
GLOSS: $70 \pm 15\%$; HAZE: $8 \pm 3\%$;
- GG STRUCTURE; TP-IC: EXC80W46;
- HUMIDITY: 45~85%RH
- TRANSPARENCY: 85%
- OPERATION TEMPERATURE: $-20^{\circ}C \sim 70^{\circ}C$
STORAGE TEMPERATURE: $-40^{\circ}C \sim 80^{\circ}C$
- GENERAL TOLERANCES: $\pm 0.2mm$;



AG&AF&CS COVER GLASS 1.7t
OPTICAL ADHESIVE 0.2t
ITO GLASS 0.7t



DETAIL A

DETAIL B

REV.	DATE	REVISED DESCRIPTIONS	DIMENSION UNIT	mm	MODEL NO.	GPZ-104G-PG-VX26B-S01	CUSTOMER APPROVED	NOTE
1	20.02.19	CHANGE CONNECTOR MODEL	DRAWN	BRIAN	ISSUE DATE	2020/02/19		
2			CHECK	GERALD	SCALE	-/-		
3			APPROVED	SCOTT				



坤巨資訊股份有限公司
Groovy Technology Corp.